

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001292

International filing date: 04 April 2005 (04.04.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0407653.5
Filing date: 03 April 2004 (03.04.2004)

Date of receipt at the International Bureau: 06 June 2005 (06.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 1 2 9 2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersey

Dated 19 May 2005

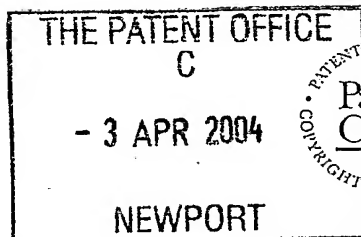

05APR04 EBB6398-1 062658
P01/7700 0.00-0407653.5 NONE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

- 3 APR 2004

1. Your reference

2. Patent application number

(The Patent Office will fill this part in)

0407653.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

JOHN DOWNES

28 MERE AVENUE

Patents ADP number (if you know it)

RABY MERE

If the applicant is a corporate body, give the country/state of its incorporation

WIRRAL - CH63 0NE

4107587001

4. Title of the invention

DEVICE FOR PREVENTING VEHICLE WHEEL SPRAY

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

502
5177.

OLSWANG

MR J. DOWNES

90 High Holborn

28 MERE AVENUE

LONDON

RABY MERE

WELW 6XX

WIRRAL - CH63 0NE

Patents ADP number (if you know it)

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note d)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

No

Patents Form 1/77.

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description

5

Claim(s)

—

Abstract

—

Drawing(s)

3 only for.

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)


Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)



Date 31. MAR. 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

J. Downes

01928 511476
0151 343 1607

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

Title: Spray Prevention Device

The present invention relates to a device to prevent spray from emerging from the wheels of vehicles travelling along roadways in wet weather.

When vehicles (particularly large vehicles such as lorries) travel along a roadway in wet weather, a spray or mist is generated by the wheels which can seriously impair the vision of drivers of vehicles behind. This is very dangerous and can lead to accidents.

This spray occurs because water on the road is picked up by the rotating tyres and thrown off against the wheel arch. As the water hits the wheel arch, so the water is broken up into small droplets and atomised in the air to create a fine spray or mist. This spray is then ejected sideways out of the wheel arch. In extreme conditions, this spray can be impossible to see through.

It has been known to try and reduce such a spray by lining the rear of a wheel arch with a flap with surface bristles or a mesh which helps to cushion or reduce reflection of the water as it emerges from the wheel. This helps to reduce the break up of water into small particles. This does not however separate the water from the air.

UK Patent Specification 2229689 describes a spray inhibiting wheel guard. This wheel guard is curved to form the rear half of a wheel arch, and consists of a series of longitudinal channels between baffles to guide water out of the wheel arch area and direct it back onto a roadway. It has been found that this arrangement does not work since, when the vehicle is travelling at speed, air is forced into the upper area of the channels creating a back pressure in the channels by travelling down the pockets which prevents the spray from entering the channels.

The present invention seeks to provide a solution to this problem by separating the water from the air in the spray rather than trying to inhibit its formation.

According to the present invention there is provided a device to prevent spray from emerging from the wheels of vehicles travelling along roadways in wet weather said device comprising a ~~panel for mounting generally vertically behind the wheel of a vehicle to receive on a first side of~~ the panel water released by the wheel as it rotates, said panel including at least one passage which leads from the first side to a rear second side of the panel, the or each passage being other than normal to the plane of the panel, and at least one water-collecting pocket along the side of each passage, in use air and water entering the or each passage with air passing through the or each passage and being free to enter ambient air on the second side of the panel but water collecting in the or each passage pocket.

Preferably the panel is formed from a plurality of vertical baffles in a side by side relationship with passages formed therebetween. Preferably the vertical baffles are of identical shape. Preferably the baffles overlap one another. Preferably the panel is substantially planar.

Preferably the or each passage is non-linear. Preferably the or each passage has two changes of direction. Preferably pockets are positioned generally at a tangent to the change of direction in the passages.

The or each pockets may be a channel running vertically down the baffles whereby water drains down each channel back onto the roadway. The channels may be generally U-shaped. In one embodiment three pockets are formed on each baffle.

An embodiment of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of the wheel arch of a road vehicle with the device fitted,

Figure 2 shows a an enlarged view of Figure 1, and

Figure 3 shows a section of Figure 1 showing in schematic form the flow of air and spray there through.

Referring to Figure 1 there is shown a vehicle 1 with a wheel arch 2 over a wheel 3. Mounted below the wheel arch and between the wheel 3 and wheel arch 2 is a generally planar panel 4 made up from a plurality of identical baffles 5 with passages 6 leading from a first side of the

panel through to a second side of the panel as shown more clearly in Figure 2. Each baffle includes three water-collecting pockets in the form of vertical U-shaped channels 7A,7B,7C on the side of passage 6. In use (as described more fully below) on wet road surfaces, water 8 is thrown up by the wheel onto the first side of the panel 4 and passes with air through the passage 6, but a substantial amount of the water is separated from the air collected by channels 7A,7B,7C and falls as a stream of water 9 out of the bottom of the panel.

Referring now to Figures 2 and 3, it will be seen that the baffles 5 each overlap so that the passage takes a generally curvaceous path through the panel 4, i.e. the passage is not normal to the plane of the panel and is non-linear through the panel.

Figure 3 shows a path of water and air being thrown at two of the baffles. As viewed, the left hand part of the path throws water and air into the first channel 7A where water will collect. The path then changes direction a first time as shown at "A" as it follows the passage 6. As it changes direction, because water is heavier than air, the water particles tend to follow a straight path and leave the air flow at a tangent thereto into pocket 7B located at a tangent to the change of direction of the passage. The path then changes direction a second time as shown at "B" as it exits passage 6 and much of the water not collected by pocket 7B will leave the air flow at a tangent into pocket 7C located at a tangent to the second change of direction of the passage 6. The air, with much reduced water content, exiting the passage 6 is free to mix with ambient air.

It has been found that good separation of water from air is achievable.

It is envisaged that the panel may take a form different to that specifically described above. For example the passage through the panel may change direction only once or more than twice. The pockets may be other than U-shaped channels.

It is envisaged that such a panel may be formed by extruding the baffles, and joining the baffles in side by side relationship, e.g. with elongate horizontal shafts supporting spacers between baffles.

Further modifications will be apparent to those skilled in the art without departing from the scope of the present invention.

RECEIVED
JAN 10 1964
U.S. AIR FORCE
RESEARCH & DEVELOPMENT
DIVISION
WASHINGTON, D.C.



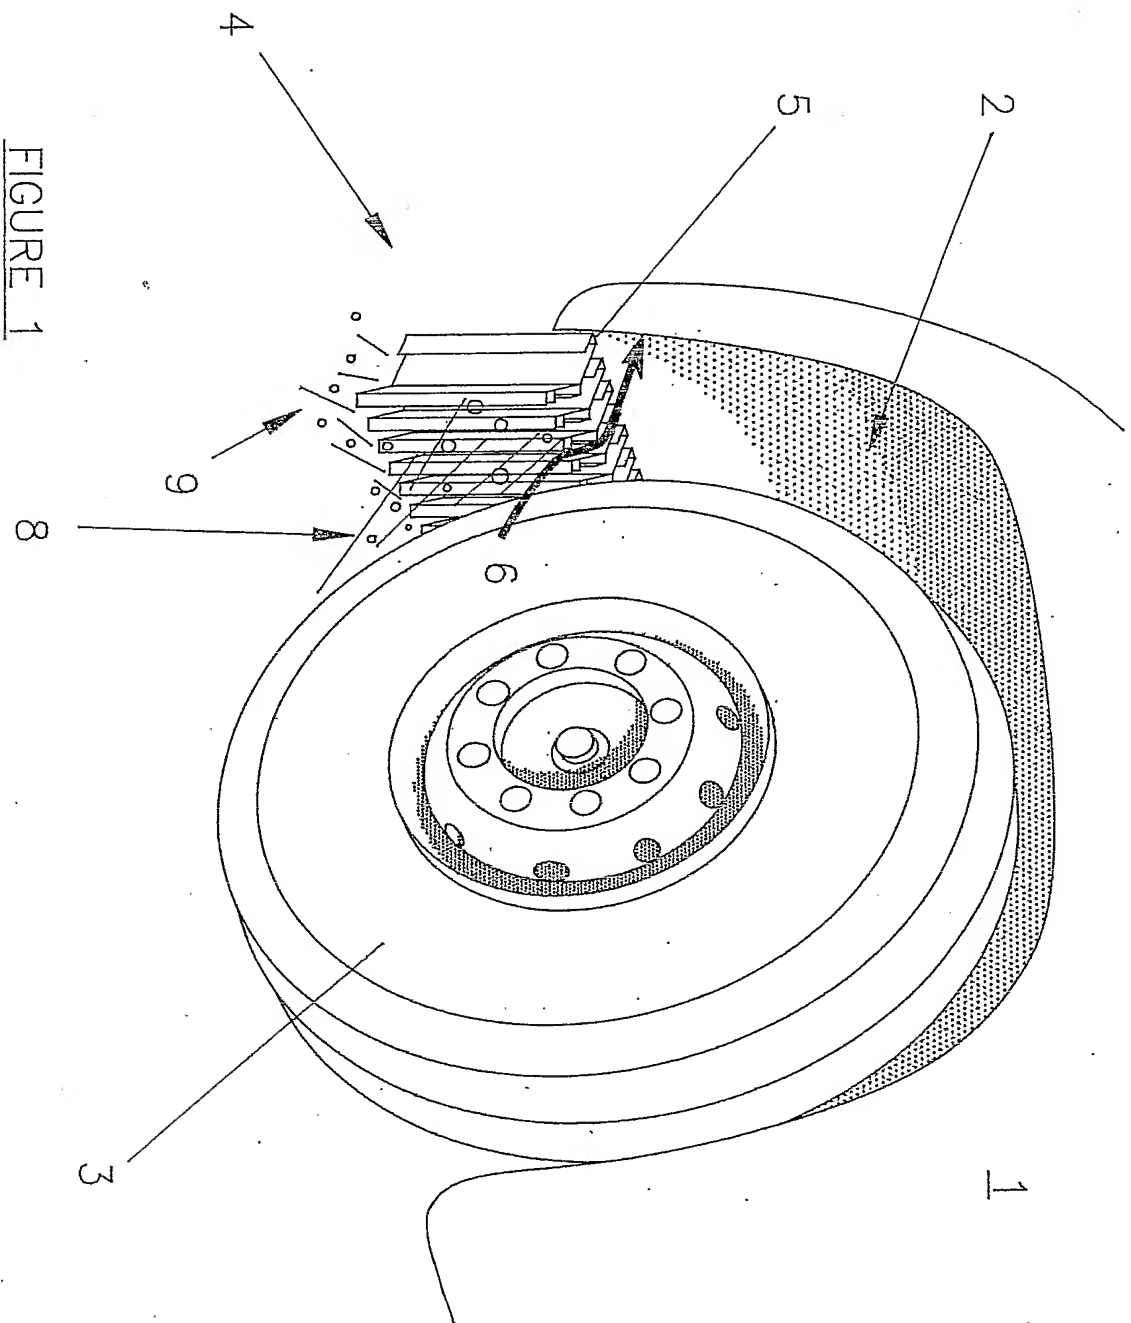


FIGURE 1



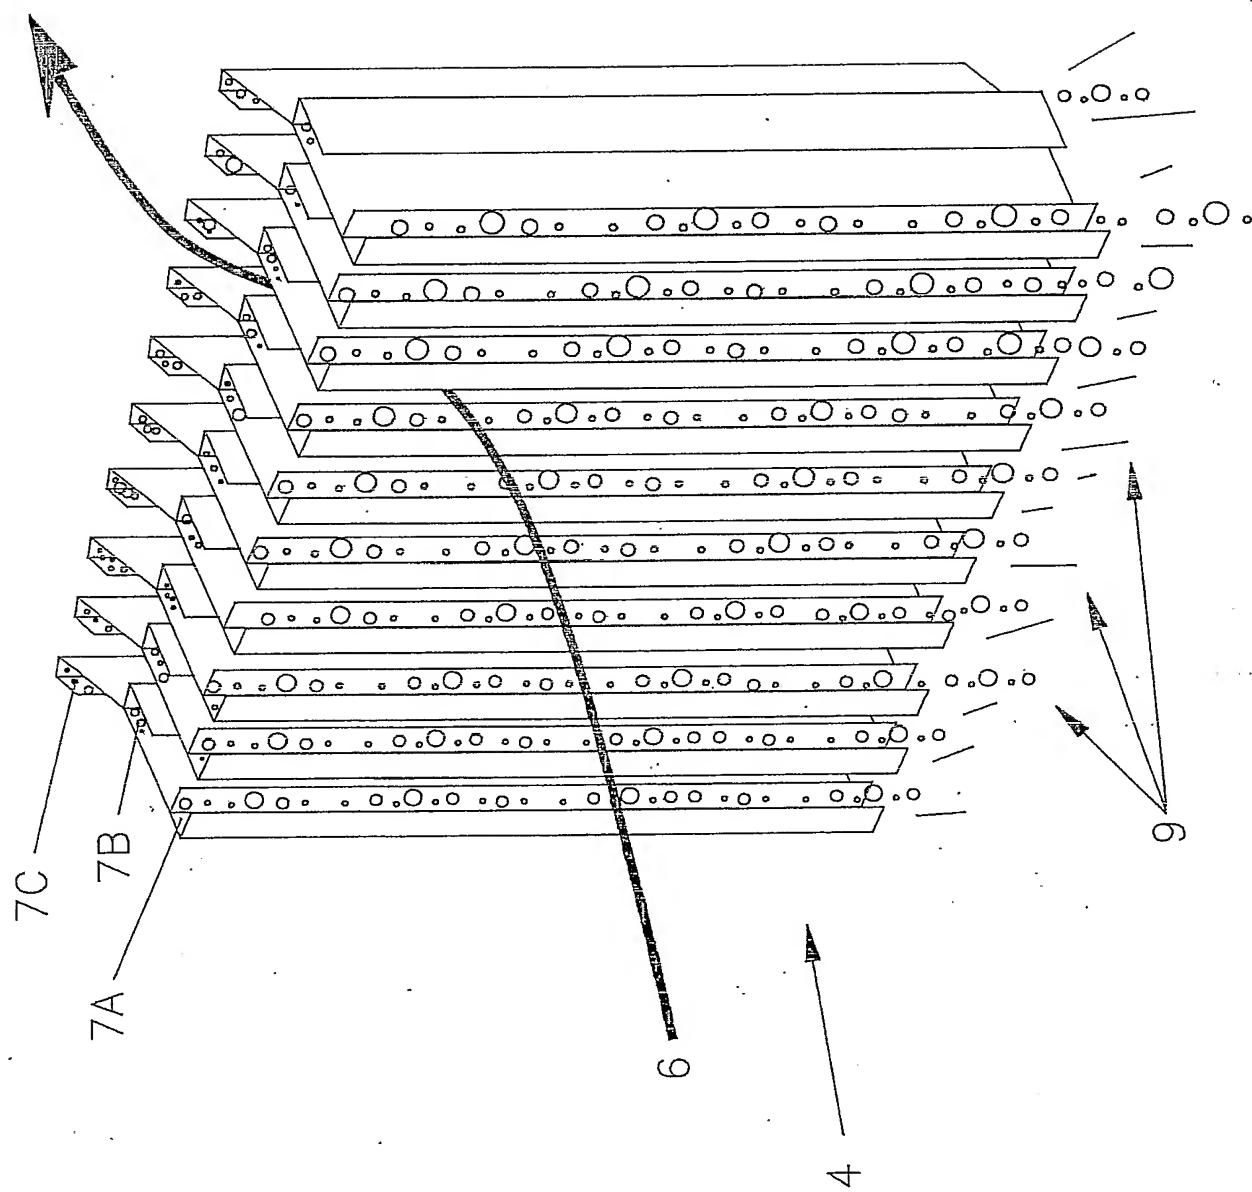


FIGURE 2



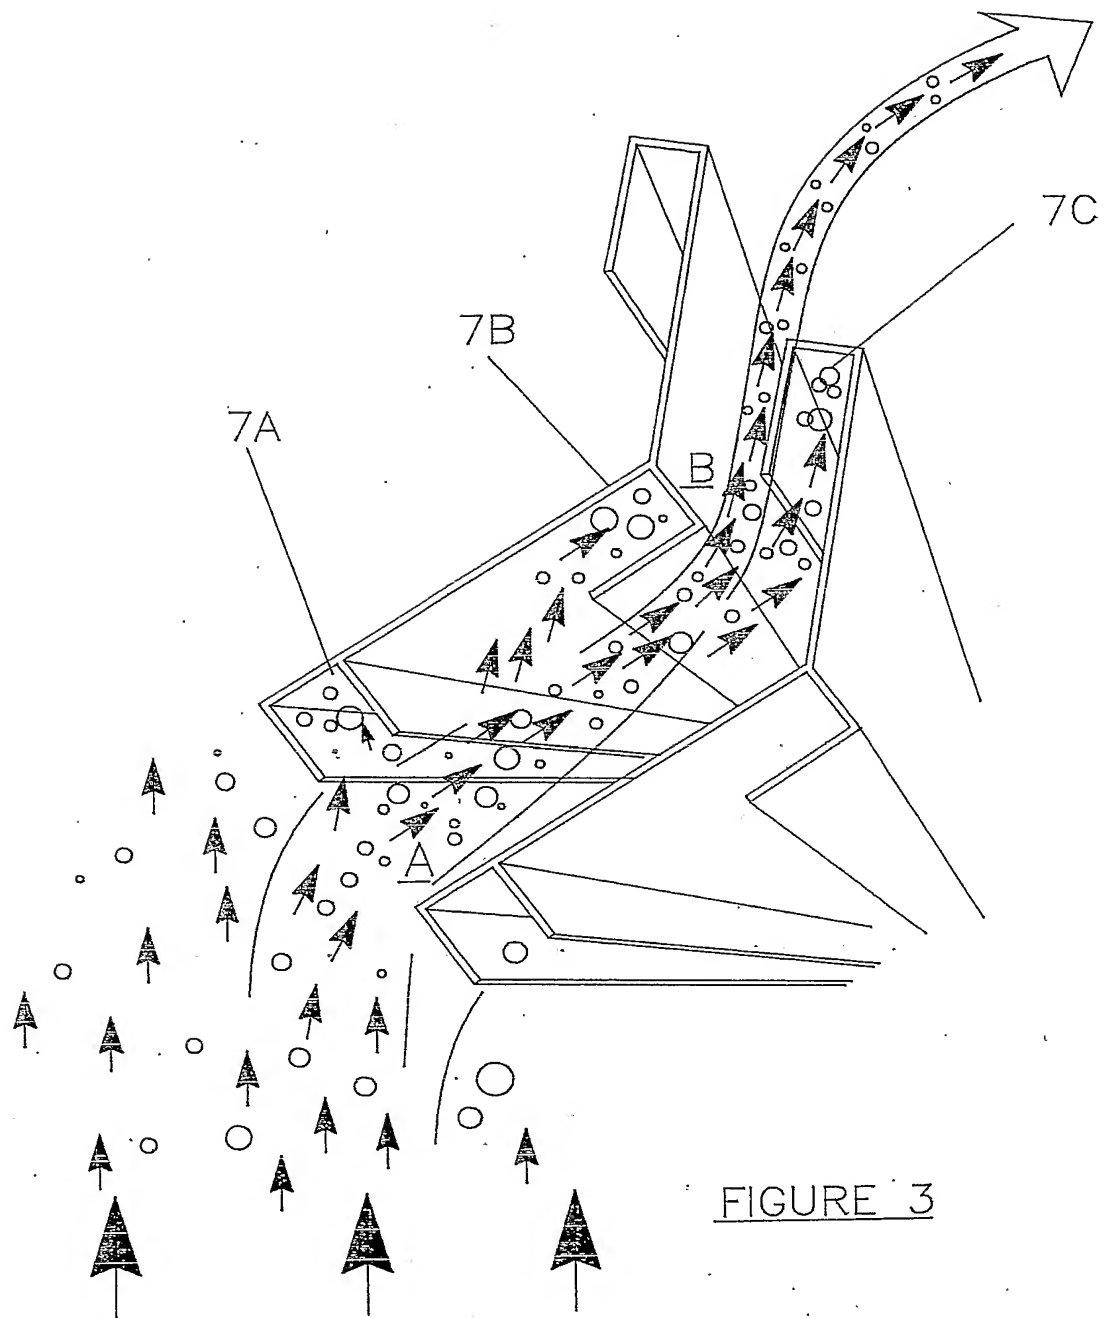


FIGURE 3

